

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** DOTLUX

**Supplier's address:** Produktmanagement, Richard-Stücklen-Str. 7, 91781 Weißenburg, DE

**Model identifier:** 3942-040IP205M

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Other electric interface		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	48	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 200 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	48,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	92
Outer dimensions without separate control gear, light-	Height	1	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	8	
	Depth	5 000	
			See image in last page


ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,374 0,372
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	1 337	Beam angle in degrees, or the range of beam angles that can be set	120
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	77	Survival factor	0,80
the lumen maintenance factor	0,10		

(a) : not applicable;

(b) : not applicable;

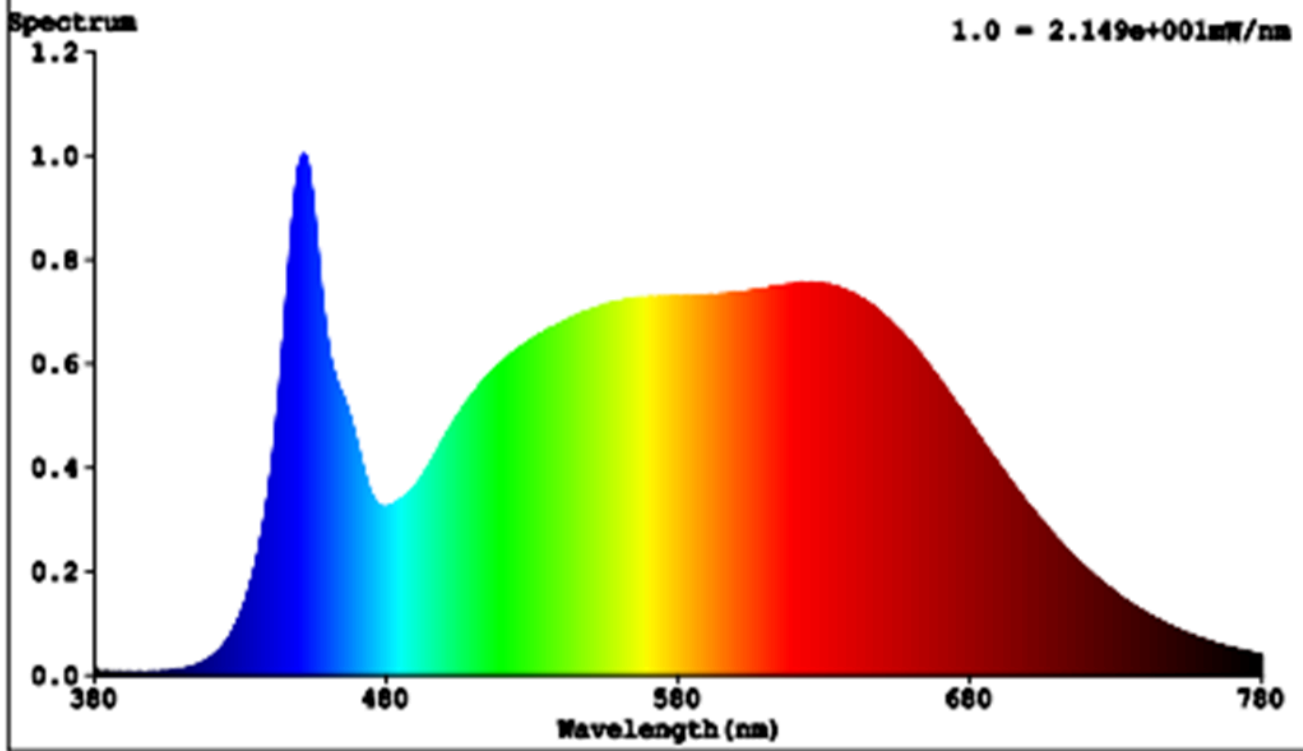

Model placed on the Union market from 01/01/2018



**EPREL registration number:** 714778

<https://eprel.ec.europa.eu/qr/714778>

**Supplier:** DOTLUX GmbH (Manufacturer)

**Website:** [www.dotlux.de](http://www.dotlux.de)

**Customer care service:**

**Name:** Produktmanagement

**Website:** [www.dotlux.de](http://www.dotlux.de)

**Email:** [info@dotlux.de](mailto:info@dotlux.de)

**Phone:** 09141 4051 0

**Address:**

Richard-Stücklen-Str. 7  
91781 Weißenburg  
Germany