

PRODUCT NO. 5399-25


**DOTLUX LED glass tube NANOTUBE 97cm 12W 4000K frosted PU25**



to the product page



- Excellent durability thanks to UV-resistant, non-yellowing glass
- Glass cover enables better lighting effect
- Simple replacement of fluorescent tubes with starter
- Full, optimum light output immediately after switching on
- Can only be ordered in packaging units, not available individually
- 1 PU contains 25 pieces

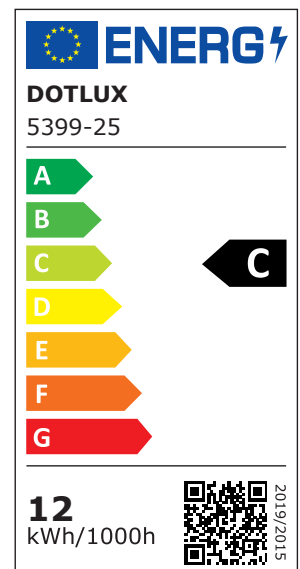

SUCCESSION ARTICLE	-
PREDECESSOR ARTICLE	2747-240180
WEIGHT IN KG	0.145
LUMEN PER WATT	160
POWER CONSUMPTION IN WATTS	12
NET LUMINOUS FLUX IN LUMENS	1920

**Dimensions**

**length:** 982mm  
**diameter:** 28mm

BEAM ANGLE	220
DIMMABLE	No
PROTECTION CLASS (IP)	IP20
INPUT VOLTAGE	220 - 240 V AC
BASE	G13
COLOR TEMPERATURE IN KELVIN	4000
COLOR-RENDERING-INDEX	CRI > 82
CONSTRUCTION	T8
POWER FACTOR	0,97
INRUSH CURRENT IN A	0
LUMEN PER WATT	160
HOUSING COLOUR	white
L80/B10	30000
RATED CURRENT	0.06
DIMMING WITHOUT DIMMER	No
ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	C
LIFETIME L80/B10 AT 25°C	30000
LED-LIFETIME LIGHT SOURCE L70/B50 AT 25°C	60000
ETIM GRUPPEN-ID	EC001959
COLOUR CONSISTENCY (MCADAM ELLIPSE)	SDCM6
PHOTOBIOLOGICAL SAFETY ACCORDING TO EN 62471	RG0
COMPATIBLE WITH APPLE HOMEKIT	No
COMPATIBLE WITH GOOGLE ASSISTANT	No

<b>COMPATIBLE WITH AMAZON ALEXA</b>	No
<b>IFTTT SUPPORT AVAILABLE</b>	No
<b>LAMP SHAPE</b>	Tube, single-ended
<b>FILAMENT LAMP</b>	No
<b>LAMP DESIGNATION</b>	T8
<b>REMOTE OPERATION POSSIBLE</b>	No
<b>WITH REMOTE CONTROL</b>	No
<b>LIFETIME L70/B50 AT 25°C</b>	60000
<b>LIFETIME L90/B10 AT 25°C</b>	15000
<b>PULSE DURATION IN µS</b>	0
<b>LIGHT COLOUR ACCORDING TO EN 12464-1</b>	neutral white 3300 to 5300 K
<b>BEG FUNDING</b>	Only relevant in Germany
<b>TYPE OF GLASS/COVER</b>	Opal
<b>COLOUR</b>	White