

PRODUCT NO. 5400-25


DOTLUX LED glass tube NANOTUBE 104.7cm 14W 4000K frosted PU=25 pieces



to the product page



- Excellent durability thanks to UV-resistant, non-yellowing glass
- Glass cover enables better lighting effect
- Simple replacement of fluorescent tubes with starter
- Full, optimum light output immediately after switching on
- Can only be ordered in packaging units, not available individually
- 1 PU contains 25 pieces

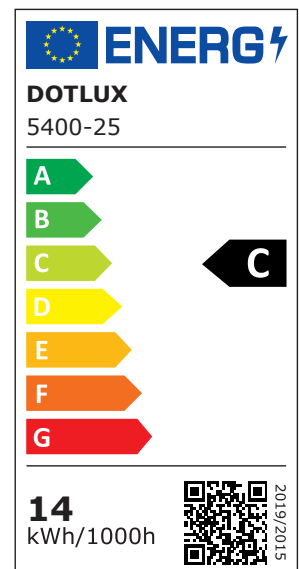

SUCCESSION ARTICLE	-
PREDECESSOR ARTICLE	2746-140180
WEIGHT IN KG	3.95
LUMEN PER WATT	160
POWER CONSUMPTION IN WATTS	14
NET LUMINOUS FLUX IN LUMENS	2240

Dimensions

length: 1059mm
diameter: 28mm

BEAM ANGLE	220
DIMMABLE	No
PROTECTION CLASS (IP)	IP20
INPUT VOLTAGE	220 - 240 V AC
SERVICE LIFE	approx. 30.000 h at 25°C
BASE	G13
COLOR TEMPERATURE IN KELVIN	4000
COLOR-RENDERING-INDEX	CRI > 82
CONSTRUCTION	T8
POWER FACTOR	0,9
INRUSH CURRENT IN A	0
LUMEN PER WATT	160
HOUSING COLOUR	white
L80/B10	30000
RATED CURRENT	0.07
DIMMING WITHOUT DIMMER	No
ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	C
LIFETIME L80/B10 AT 25°C	30000
LED-LIFETIME LIGHT SOURCE L70/B50 AT 25°C	50000
ETIM GRUPPEN-ID	EC001959
COLOUR CONSISTENCY (MCADAM ELLIPSE)	SDCM6
PHOTOBIOLOGICAL SAFETY ACCORDING TO EN 62471	RG0
COMPATIBLE WITH APPLE HOMEKIT	No

COMPATIBLE WITH GOOGLE ASSISTANT	No
COMPATIBLE WITH AMAZON ALEXA	No
IFTTT SUPPORT AVAILABLE	No
LAMP SHAPE	Tube, single-ended
FILAMENT LAMP	No
LAMP DESIGNATION	T8
REMOTE OPERATION POSSIBLE WITH REMOTE CONTROL	No
LIFETIME L70/B50 AT 25°C	50000
LIFETIME L90/B10 AT 25°C	12500
PULSE DURATION IN µS	0
LIGHT COLOUR ACCORDING TO EN 12464-1	neutral white 3300 to 5300 K
BEG FUNDING	Only relevant in Germany
TYPE OF GLASS/COVER	Opal
COLOUR	White