

PRODUCT NO. 5401-25


DOTLUX LED glass tube NANOTUBE 120cm 18W 4000K frosted PU25



to the product page



- Excellent durability thanks to UV-resistant, non-yellowing glass
- Glass cover enables better lighting effect
- Simple replacement of fluorescent tubes with starter
- Full, optimum light output immediately after switching on
- Can only be ordered in packaging units, not available individually
- 1 PU contains 25 pieces

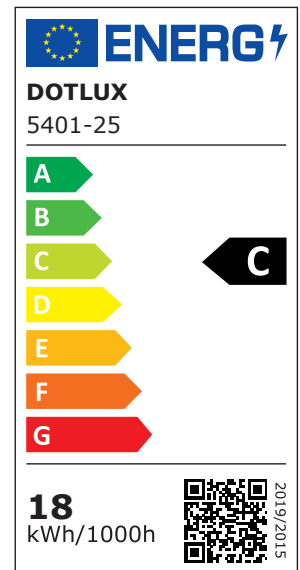

SUCCESSION ARTICLE	-	BEAM ANGLE	220
PREDECESSOR ARTICLE	1629-240180 3202-1	DIMMABLE	No
WEIGHT IN KG	4.4	PROTECTION CLASS (IP)	IP20
POWER CONSUMPTION IN WATTS	18	INPUT VOLTAGE	220 - 240 V AC
NET LUMINOUS FLUX IN LUMENS	2880	SERVICE LIFE	approx. 30.000 h at 25°C
LUMEN PER WATT	160	BASE	G13
		COLOR TEMPERATURE IN KELVIN	4000
		COLOR-RENDERING-INDEX	CRI > 82
		CONSTRUCTION	T8
		POWER FACTOR	0,96
		INRUSH CURRENT IN A	0
		LUMEN PER WATT	160
		HOUSING COLOUR	white
		L80/B10	30000
		RATED CURRENT	0.09
		DIMMING WITHOUT DIMMER	No
		ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	C
		LIFETIME L80/B10 AT 25°C	30000
		LED-LIFETIME LIGHT SOURCE L70/B50 AT 25°C	50000
		ETIM GRUPPEN-ID	EC001959
		COLOUR CONSISTENCY (MCADAM ELLIPSE)	SDCM6
		PHOTOBIOLOGICAL SAFETY ACCORDING TO EN 62471	RG0
		COMPATIBLE WITH APPLE HOMEKIT	No

Dimensions

length: 1212mm
diameter: 28mm

COMPATIBLE WITH GOOGLE ASSISTANT	No
COMPATIBLE WITH AMAZON ALEXA	No
IFTTT SUPPORT AVAILABLE	No
LAMP SHAPE	Tube, single-ended
FILAMENT LAMP	No
LAMP DESIGNATION	T8
REMOTE OPERATION POSSIBLE WITH REMOTE CONTROL	No
LIFETIME L70/B50 AT 25°C	50000
LIFETIME L90/B10 AT 25°C	12500
PULSE DURATION IN µS	0
LIGHT COLOUR ACCORDING TO EN 12464-1	neutral white 3300 to 5300 K
BEG FUNDING	Only relevant in Germany
TYPE OF GLASS/COVER	Opal
COLOUR	White