


PRODUCT NO. 4936-1

**DOTLUX LED power supply QUICK-FIXadapt CC 400-700mA**

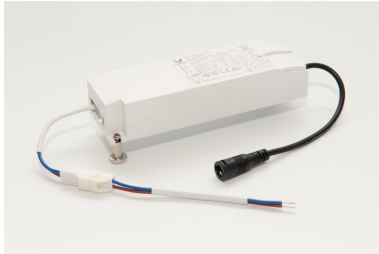

to the product page

Non-dimmable power supply unit for QUICK-FIXadapt with 500mA and IP40.

- incl. magnetic attachment
- Input voltage: 220-240 V AC
- Output voltage: 27 - 42 V DC
- The temperature range at which the power supply unit can be used is between -20°C and 40°C.
- The cable length of the power supply unit is 24cm.
- Adjustable to 400mA, 500mA, 600mA, 700mA via dip switch

<b>SUCCESSION ARTICLE</b>	-	<b>PROTECTION CLASS (IP)</b>	IP20
<b>PREDECESSOR ARTICLE</b>	4936	<b>INPUT VOLTAGE</b>	186 - 240 AC/DC
<b>WEIGHT IN KG</b>	0.15	<b>OUTPUT CURRENT IN A</b>	0,5
<b>POWER CONSUMPTION IN WATTS</b>	20	<b>POWER FACTOR</b>	0,96
		<b>INRUSH CURRENT IN A</b>	0
		<b>TC TEMPERATURE IN °C</b>	85
		<b>PROTECTION CLASS</b>	II
		<b>SUITED FOR EMERGENCY LIGHTING</b>	yes
<b>Dimensions</b>		<b>OUTPUT VOLTAGE</b>	25 - 40 DC
<b>length:</b> 152mm		<b>WARRANTY IN YEARS</b>	5
<b>width:</b> 48mm		<b>DIMMING WITHOUT DIMMER</b>	No
<b>height:</b> 43mm		<b>ETIM GRUPPEN-ID</b>	EC002710
		<b>DIMMING 0-10 V</b>	No
		<b>DIMMING 1-10 V</b>	No
		<b>DIMMING DALI</b>	No
		<b>DIMMING DMX</b>	No
		<b>DIMMING DSI</b>	No
		<b>DIMMING POTENTIOMETER (INTEGRATED)</b>	No
		<b>DIMMING LINESWITCH</b>	No
		<b>DIMMING MANUFACTURER'S PROPRIETARY SYSTEM</b>	No
		<b>DIMMING MAINS VOLTAGE MODULATION</b>	No
		<b>DIMMING PHASE CUT-OFF</b>	No
		<b>DIMMING PROGRAMMABLE</b>	No
		<b>DIMMING RF</b>	No
		<b>DIMMING SINE WAVE REDUCTION</b>	No

<b>DIMMING TOUCH AND DIM</b>	No
<b>DIMMING ZIGBEE</b>	No
<b>DIMMING WITH PUSH-BUTTON</b>	No
<b>NO DIM FUNCTION</b>	Yes
<b>SUITABLE FOR EMERGENCY LIGHTING</b>	Yes
<b>COMPATIBLE WITH CASAMBI</b>	No
<b>COMPATIBLE WITH APPLE HOMEKIT</b>	No
<b>COMPATIBLE WITH GOOGLE ASSISTANT</b>	No
<b>COMPATIBLE WITH AMAZON ALEXA</b>	No
<b>DIMMING PHASE CUT-ON</b>	No
<b>DIMMING GPRS</b>	No
<b>PULSE DURATION IN <math>\mu</math>S</b>	0
<b>BEG FUNDING</b>	Only relevant in Germany