


PRODUCT NO. 4826-040120-B-Ware

**DOTLUX LED panel FLATevo 620x620mm max. 36W UGR<19 4000K B-goods**

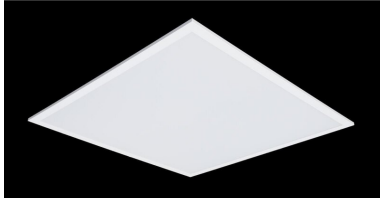

to the product page

- Recessed LED luminaire with CDP Nano microprismatic cover for glare-free light distribution
- UGR<19 suitable for VDU workstations
- Low-current LEDs in conjunction with large-area cooling on the rear guarantee a long LED service life and consequently low maintenance costs
- Easy to install and service thanks to DC system plug (Plug&Play compatible with all DOTLUX power supply units)

**Power consumption with different ballasts:**

- 40W @ 1050 mA
- 36W @ 950 mA
- 27W @ 700 mA
- 20W @ 500 mA
- 14W @ 350 mA

This product is compatible with our mounting frame 5226.

<b>SUCCESSION ARTICLE</b>	4826-140120	<b>BEAM ANGLE</b>	90
<b>WEIGHT IN KG</b>	2.116	<b>PROTECTION CLASS (IP)</b>	IP40
<b>POWER CONSUMPTION IN WATTS</b>	36	<b>SERVICE LIFE</b>	approx. 50.000 h at 25°C
<b>NET LUMINOUS FLUX IN LUMENS</b>	4320	<b>COLOR TEMPERATURE IN KELVIN</b>	4000
<b>LUMEN PER WATT</b>	120	<b>COLOR-RENDERING-INDEX</b>	CRI > 82
		<b>INRUSH CURRENT IN A</b>	0
		IK protection	
		<b>LUMEN PER WATT</b>	120
<b>Dimensions</b>		<b>PROTECTION CLASS</b>	III
<b>length:</b> 620mm		<b>HOUSING COLOUR</b>	white
<b>width:</b> 620mm		<b>GLARE-FREE</b>	UGR < 19
<b>height:</b> 30mm		<b>SWITCH CYCLES</b>	> 100.000
		<b>WARRANTY IN YEARS</b>	0
		<b>ASSORTMENT</b>	Proline
		<b>ETIM GRUPPEN-ID</b>	EC002892
		<b>DIMMING DEPENDING ON CONTROL GEAR</b>	Yes
		<b>IMPACT STRENGTH</b>	IK02
		<b>PULSE DURATION IN µS</b>	0
		<b>SURFACE PROTECTION HOUSING</b>	Powder coating