

PRODUCT NO. 6212-030170

DOTLUX LED exchangeable module QUICK-FIXtwilight 3W 3000K Daylight sensor



to the product page


- Universal MAGNET LED module with integrated driver and daylight sensor for quick and easy replacement of light sources in existing ceiling and wall luminaires
- Extra high magnetic feet enable installation above the existing cabling
- Very high efficiency of up to 125lm/W thanks to low-current LEDs and therefore long service life
- Special lenses with 170° beam angle ensure absolutely shadow-free light distribution even in larger luminaires up to 400mm

Different operating modes of the Twilight module:

1. continuous "ON" without daylight sensor
2. daylight sensor activated:

Light ON switching threshold approx. 20 LUX

Light OFF switching threshold approx. 40 LUX

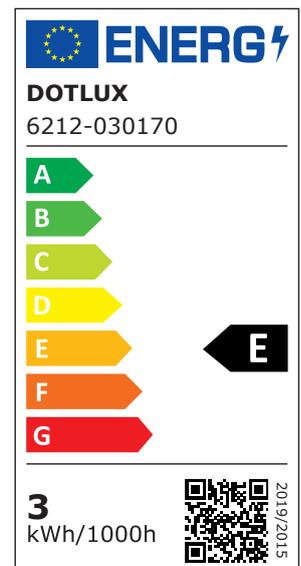

SUCCESSION ARTICLE	-	BEAM ANGLE	170
WEIGHT IN KG	0.1	PROTECTION CLASS (IP)	IP40
POWER CONSUMPTION IN WATTS	3	INPUT VOLTAGE	186 - 240 AC/DC
NET LUMINOUS FLUX IN LUMENS	375	SERVICE LIFE	approx. 50.000 h at 25°C
LUMEN PER WATT	125	COLOR TEMPERATURE IN KELVIN	3000
		POWER FACTOR	0,5
		LUMEN PER WATT	125
		PROTECTION CLASS	II
Dimensions		VOLTAGE TYPE	AC
height: 35mm		SWITCH CYCLES	> 100.000
diameter: 120mm		INPUT VOLTAGE SPAN	186-240
		WARRANTY IN YEARS	3
		L80/B10	50000
		DIMMING WITHOUT DIMMER	No
		INPUT VOLTAGE RANGE LUMINAIRE	186-240
		ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	E
		MOUNTING LOCATION	Indoor + Outdoor
		LIFETIME L80/B10 AT 25°C	50000
		LED-LIFETIME LIGHT SOURCE L70/B50 AT 25°C	100000
		ETIM GRUPPEN-ID	EC000996
		NO DIM FUNCTION	Yes
		COLOUR CONSISTENCY (MCADAM ELLIPSE)	SDCM5

CONNECTION TYPE	Cable
PHOTOBIOLOGICAL SAFETY ACCORDING TO EN 62471	RG0
COMPATIBLE WITH APPLE HOMEKIT	No
COMPATIBLE WITH GOOGLE ASSISTANT	No
COMPATIBLE WITH AMAZON ALEXA	No
IFTTT SUPPORT AVAILABLE	No
FLEXIBLE	Nein
SUITABLE FOR TRAFFIC LIGHTS	No
EXTERNAL DRIVER REQUIRED	No
SUITABLE FOR CONSTANT VOLTAGE	No
SUITABLE FOR GENERAL LIGHTING	Yes
SUITABLE FOR CONSTANT CURRENT	No
SUITABLE FOR RAIL TRAFFIC	No
SUITABLE FOR MATRIX INFORMATION BOARDS	No
SUITABLE FOR VARIABLE ROAD SIGNS	No
LIFETIME L70/B50 AT 25°C	100000
LIFETIME L90/B10 AT 25°C	25000
LIGHT COLOUR ACCORDING TO EN 12464-1	warm white <3300 K
BEG FUNDING	Only relevant in Germany
LED-BETRIEBSSTROM IN MA	13
SHAPE	Round
COLOUR	White