


PRODUCT NO. 5363-040120-B-Ware

DOTLUX LED panel RIMLESS 620x620x max.42W 1050mA 4000K

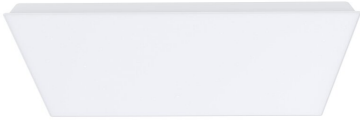

to the product page

- Save even more energy with highly efficient LEDs with a luminous efficacy of 165Lm/W
- Frameless design for large-area illumination (also great for SKYLIGHT motifs)
- Homogeneous luminous surface with frosted cover provides pleasant light distribution
- Easy to install and service thanks to DC system plug (Plug&Play compatible with all DOTLUX power supplies)

Power consumption with through-wired power supply Art. 5334

45W @1050 mA = 6950Lm
 42W @ 950 mA = 6490Lm
 30W @ 700 mA = 4800Lm
 26W @ 600 mA = 4120Lm

This product is compatible with our surface mount frame 5226.

SUCCESSION ARTICLE	-	BEAM ANGLE	120
WEIGHT IN KG	1.756	PROTECTION CLASS (IP)	IP40
POWER CONSUMPTION IN WATTS	max. 42	LIGHT COLOR	white
NET LUMINOUS FLUX IN LUMENS	max. 6950	SERVICE LIFE	approx. 50.000 h at 25°C
LUMEN PER WATT	max.178	COLOR TEMPERATURE IN KELVIN	4000
		COLOR-RENDERING-INDEX	CRI > 82
		INRUSH CURRENT IN A	0
		LUMEN PER WATT	max.178
		PROTECTION CLASS	III
Dimensions		INPUT VOLTAGE SPAN	37-40
length: 620mm		WARRANTY IN YEARS	0
width: 620mm		INPUT VOLTAGE RANGE LUMINAIRE	37-40
height: 30mm		ASSORTMENT	Proline
		COLOUR CONSISTENCY (MCADAM ELLIPSE)	SDCM6
		PULSE DURATION IN µS	0
		BEG FUNDING	only relevant in Germany
		COLOUR OF LIGHT ADJUSTABLE	No