


PRODUCT NO. 5321-099140-B-Ware

DOTLUX Mirror light TRENDosocket 10W 3000/4000/5700K COLORselect B-Goods

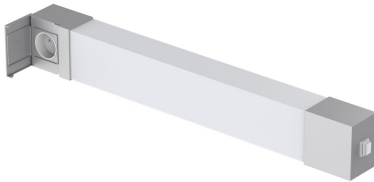

to the product page

- Modern, stylish design with integrated Schuko socket outlet and side switch
- Maximum lighting surface without visible screw connections
- EASYbase platform enables quick and easy installation
- Installation on existing drill holes possible thanks to free surface on the base plate
- 2 cable inlets pre-installed (individual inlets can be drilled into the aluminum base if required)
- Simply set your desired light color yourself, one article number - three light colors through COLORselect
- Sustainable product design thanks to easily replaceable components

| | |
|------------------------------------|------|
| WEIGHT IN KG | 0.73 |
| POWER CONSUMPTION IN WATTS | 10 |
| NET LUMINOUS FLUX IN LUMENS | 1050 |
| LUMEN PER WATT | 105 |

Dimensions

length: 599mm
width: 85mm
height: 57mm

| | |
|---|--------------------------|
| BEAM ANGLE | 140 |
| PROTECTION CLASS (IP) | IP44 |
| LIGHT COLOR | multicoloured |
| INPUT VOLTAGE | 220 - 240 V AC |
| SERVICE LIFE | approx. 50.000 h at 25°C |
| COLOR TEMPERATURE IN KELVIN | 3000/4000/5700 |
| COLOR-RENDERING-INDEX | CRI > 82 |
| INRUSH CURRENT IN A | 0 |
| IK PROTECTION | IK08 |
| LUMEN PER WATT | 105 |
| PROTECTION CLASS | I |
| HOUSING COLOUR | multicoloured |
| SWITCH CYCLES | > 100.000 |
| INPUT VOLTAGE SPAN | 220-240 |
| WARRANTY IN YEARS | 0 |
| SIMILAR TO RAL-COLOUR | 9006 |
| INPUT VOLTAGE RANGE LUMINAIRE | 220-240 |
| ASSORTMENT | Proline |
| ETIM GRUPPEN-ID | EC002892 |
| MATERIAL COVER | Plastic matt/satinized |
| DIMMING 0-10 V | No |
| DIMMING 1-10 V | No |
| DIMMING DALI | No |
| DIMMING DMX | No |
| DIMMING DSI | No |
| DIMMING POTENTIOMETER (INTEGRATED) | No |

| | |
|--|--------------------------|
| DIMMING LINESWITCH | No |
| DIMMING MANUFACTURER'S PROPRIETARY SYSTEM | No |
| DIMMING MAINS VOLTAGE MODULATION | No |
| DIMMING PHASE CUT-OFF | No |
| DIMMING PROGRAMMABLE | No |
| DIMMING RF | No |
| DIMMING SINE WAVE REDUCTION | No |
| DIMMING TOUCH AND DIM | No |
| DIMMING ZIGBEE | No |
| DIMMING WITH PUSH-BUTTON | No |
| DIMMING DEPENDING ON CONTROL GEAR | No |
| NO DIM FUNCTION | Yes |
| COLOUR CONSISTENCY (MCADAM ELLIPSE) | SDCM6 |
| IMPACT STRENGTH | IK08 |
| COLOUR OF LIGHT ADJUSTABLE | Positions |
| DIMMING DALI-2 | No |
| DIMMING PHASE CUT-ON | No |
| DIMMING GPRS | No |
| PULSE DURATION IN μS | 0 |
| BEG FUNDING | Only relevant in Germany |