

PRODUCT NO. 3943-050IP665M


**DOTLUX LED strip 48W 10mm 5000K IP66 5m roll incl. 50cm connection cable on both sides**



to the product page



- Comfortable and natural light due to extra high color rendering RA>92.
- Uniform color temperature due to 3-Step Mac Adam Binning and specially extruded IP66 protective cover
- Very densely arranged LEDs allow homogeneous illuminated areas at smallest distances
- Secure Solder Connect Technology prevents hairline cracks and cold solder joints
- Reinforced conductor paths ensure uniform brightness
- Original 3M adhesive tape provides strong hold
- 15 cm connection cable pre-mounted on one side

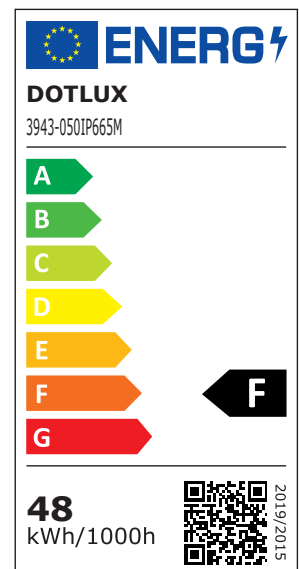

<b>SUCCESSION ARTICLE</b>	-
<b>PREDECESSOR ARTICLE</b>	1980-2
<b>WEIGHT IN KG</b>	0.235
<b>POWER CONSUMPTION IN WATTS</b>	48
<b>NET LUMINOUS FLUX IN LUMENS</b>	4200

<b>BEAM ANGLE</b>	120
<b>PROTECTION CLASS (IP)</b>	IP66
<b>LIGHT COLOR</b>	white
<b>SERVICE LIFE</b>	approx. 50.000 h at 25°C
<b>COLOR TEMPERATURE IN KELVIN</b>	5000
<b>COLOR-RENDERING-INDEX</b>	CRI > 92
<b>AMOUNT OF LED/M</b>	140
<b>SEVERABLE BY MM</b>	50
<b>LIGHT FLUX LM/M</b>	840
<b>SMALLEST BEND RADIUS IN MM</b>	25
<b>INPUT VOLTAGE SPAN</b>	24 V DC
<b>WARRANTY IN YEARS</b>	7
<b>INPUT VOLTAGE RANGE LUMINAIRE</b>	24 V DC
<b>ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015</b>	F
<b>ETIM GRUPPEN-ID</b>	EC002706
<b>BEG FUNDING</b>	Only relevant in Germany
<b>ENERGIEEFFIZIENZKLASSE DER LICHTQUELLE EINER LEUCHTE</b>	-
<b>COLOUR OF LIGHT ADJUSTABLE</b>	No

**Dimensions**

**length:** 5000mm  
**width:** 10mm  
**height:** 5mm