


PRODUCT NO. 4826-040120

DOTLUX LED panel FLATeVo 620x620mm max. 36W UGR<19 4000K

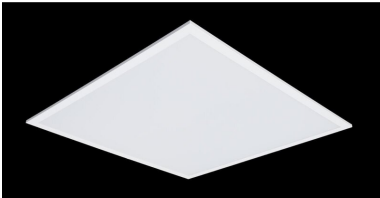

to the product page

- LED recessed luminaire with CDP Nano microprismatic diffuser for glare-free light distribution
- UGR<19 suitable for VDU workstations
- Low-current LEDs in conjunction with large-area rear cooling guarantee long LED service life and consequently low maintenance Costs

Power levels with different ballasts:

- 40W @ 1050 mA
- 36W @ 950 mA
- 27W @ 700 mA
- 20W @ 500 mA
- 14W @ 350 mA

This product is not compatible with our mounting frame 2039.

SUCCESSION ARTICLE	4826-140120	BEAM ANGLE	90
WEIGHT IN KG	2.116	PROTECTION CLASS (IP)	IP40
POWER CONSUMPTION IN WATTS	36	SERVICE LIFE	approx. 50.000 h at 25°C
NET LUMINOUS FLUX IN LUMENS	4320	COLOR TEMPERATURE IN KELVIN	4000
LUMEN PER WATT	120	COLOR-RENDERING-INDEX	CRI > 82
		INRUSH CURRENT IN A	0
		IK protection	
		LUMEN PER WATT	120
		PROTECTION CLASS	III
		HOUSING COLOUR	white
		GLARE-FREE	UGR < 19
		SWITCH CYCLES	> 100.000
		WARRANTY IN YEARS	5
		HOUSING MATERIAL	steel, powder-coated
		ASSORTMENT	Proline
		ETIM GRUPPEN-ID	EC002892
		DIMMING DEPENDING ON CONTROL GEAR	Yes
		IMPACT STRENGTH	IK02
		PULSE DURATION IN µS	0
		SURFACE PROTECTION HOUSING	Powder coating

Dimensions

- length: 620mm
- width: 620mm
- height: 30mm