

PRODUCT NO. 6036-040120


DOTLUX LED shelf light RETAILO 600mm 6W 24V 4000K



to the product page

- Professional shelf lighting for every application
- Universal magnetic LED light module for the professional replacement of T5 & T8 fluorescent tubes
- Highly efficient 72 watt LED board with lowest current consumption enables a system efficiency of max. 92 Lm/watt
- Glare-free polycarbonate cover with 120° beam angle
- Tool-free replacement of the LED module even by a non-specialist thanks to DC system plug
- Full flexibility thanks to external power supply unit (power supply unit must be ordered separately)
- 2 magnets included in the scope of delivery

Recommended ballast not dimmable 100,000 hours Article number: 6067

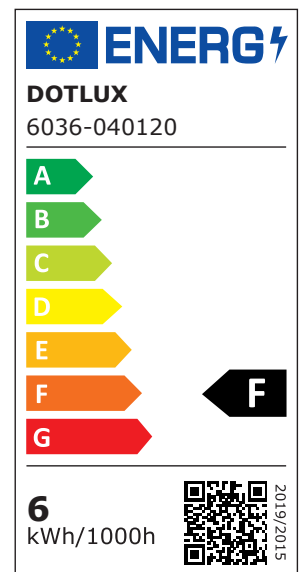

SUCCESSION ARTICLE	-
WEIGHT IN KG	0.065
POWER CONSUMPTION IN WATTS	6
NET LUMINOUS FLUX IN LUMENS	550
LUMEN PER WATT	92

Dimensions

length: 600mm
width: 20mm
height: 17mm

BEAM ANGLE	120
PROTECTION CLASS (IP)	IP20
SERVICE LIFE	approx. 50.000 h at 25°C
COLOR TEMPERATURE IN KELVIN	4000
POWER FACTOR	0,9
LUMEN PER WATT	92
PROTECTION CLASS	II
VOLTAGE TYPE	DC
SWITCH CYCLES	> 200.000
INPUT VOLTAGE SPAN	24
WARRANTY IN YEARS	5
L80/B10	200000
DIMMING WITHOUT DIMMER	No
ENABLED LICENSED PRODUCT	Yes
INPUT VOLTAGE RANGE LUMINAIRE	24
ASSORTMENT	Proline
ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	F
LIFETIME L80/B10 AT 25°C	200000
LED-LIFETIME LIGHT SOURCE L70/B50 AT 25°C	400000
ETIM GROUP IDENTIFICATION NUMBER	EC000996
NO DIM FUNCTION	No
COLOUR CONSISTENCY (MCADAM ELLIPSE)	SDCM6
CONNECTION TYPE	Cable

PHOTOBIOLOGICAL SAFETY ACCORDING TO EN 62471	RG1
COMPATIBLE WITH APPLE HOMEKIT	No
COMPATIBLE WITH GOOGLE ASSISTANT	No
COMPATIBLE WITH AMAZON ALEXA	No
IFTTT SUPPORT AVAILABLE	No
FLEXIBLE	Nein
SUITABLE FOR TRAFFIC LIGHTS	No
EXTERNAL DRIVER REQUIRED	Yes
SUITABLE FOR CONSTANT VOLTAGE	Yes
SUITABLE FOR GENERAL LIGHTING	Yes
SUITABLE FOR CONSTANT CURRENT	No
SUITABLE FOR RAIL TRAFFIC	No
SUITABLE FOR MATRIX INFORMATION BOARDS	No
SUITABLE FOR VARIABLE ROAD SIGNS	No
LIFETIME L70/B50 AT 25°C	400000
LIFETIME L90/B10 AT 25°C	100000
LIGHT COLOUR ACCORDING TO EN 12464-1	neutral white 3300 to 5300 K
BEG FUNDING	Only relevant in Germany
LED OPERATING CURRENT IN MA	266
SHAPE	Rectangular
COLOUR	White