



PRODUCT NO. 600174

**DOTLUX LED shelf light RETAILO 600mm 6W 24V 4000K incl. power supply Plug&Play Set 4 pieces**

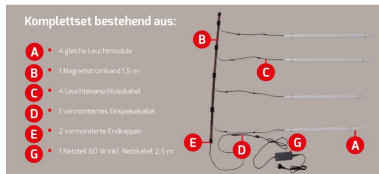

to the product page

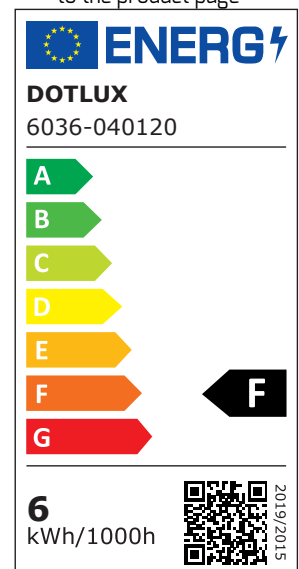

- Professional lighting for metal shelving
- Art. 3550 must be used when mounting on a wooden shelf
- Glare-free polycarbonate cover with 120° beam angle
- Tool-free replacement of the LED module also possible by a non-specialist thanks to DC system plug
- High-quality power supply unit 100,000 hours included in the magnetic strip set art. no. 6068
- 2 magnets included in the scope of delivery

The complete set consists of

- 4 identical light modules
- 1 magnetic current strip 1.5 m
- 4 light connection cables
- 1 pre-assembled feed cable
- 2 pre-assembled end caps
- 1 power supply unit 60W incl. mains cable 2.5 m

<b>SUCCESSION ARTICLE</b>	-	<b>BEAM ANGLE</b>	120
<b>WEIGHT IN KG</b>	0.9	<b>PROTECTION CLASS (IP)</b>	IP20
<b>POWER CONSUMPTION IN WATTS</b>	6	<b>SERVICE LIFE</b>	approx. 200,000 h at 25°C
<b>NET LUMINOUS FLUX IN LUMENS</b>	550	<b>COLOR TEMPERATURE IN KELVIN</b>	4000
<b>LUMEN PER WATT</b>	92	<b>POWER FACTOR</b>	0,9
		<b>LUMEN PER WATT</b>	92
		<b>PROTECTION CLASS</b>	-
<b>Dimensions</b>		<b>VOLTAGE TYPE</b>	DC
<b>length:</b> 600mm		<b>SWITCH CYCLES</b>	> 200.000
<b>width:</b> 20mm		<b>INPUT VOLTAGE SPAN</b>	24
<b>height:</b> 17mm		<b>WARRANTY IN YEARS</b>	5
		<b>L80/B10</b>	200000
		<b>DIMMING WITHOUT DIMMER</b>	No
		<b>ENABLED LICENSED PRODUCT</b>	Yes
		<b>INPUT VOLTAGE RANGE LUMINAIRE</b>	24
		<b>ASSORTMENT</b>	Proline
		<b>ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015</b>	F
		<b>LIFETIME L80/B10 AT 25°C</b>	200000
		<b>LED-LIFETIME LIGHT SOURCE L70/B50 AT 25°C</b>	400000

<b>ETIM GROUP IDENTIFICATION NUMBER</b>	EC000996
<b>COLOUR CONSISTENCY (MCADAM ELLIPSE)</b>	SDCM6
<b>CONNECTION TYPE</b>	Cable
<b>PHOTOBIOLOGICAL SAFETY ACCORDING TO EN 62471</b>	RG1
<b>COMPATIBLE WITH APPLE HOMEKIT</b>	No
<b>COMPATIBLE WITH GOOGLE ASSISTANT</b>	No
<b>COMPATIBLE WITH AMAZON ALEXA</b>	No
<b>IFTTT SUPPORT AVAILABLE</b>	No
<b>FLEXIBLE</b>	Nein
<b>SUITABLE FOR TRAFFIC LIGHTS</b>	No
<b>EXTERNAL DRIVER REQUIRED</b>	Yes
<b>SUITABLE FOR CONSTANT VOLTAGE</b>	Yes
<b>SUITABLE FOR GENERAL LIGHTING</b>	Yes
<b>SUITABLE FOR CONSTANT CURRENT</b>	No
<b>SUITABLE FOR RAIL TRAFFIC</b>	No
<b>SUITABLE FOR MATRIX INFORMATION BOARDS</b>	No
<b>SUITABLE FOR VARIABLE ROAD SIGNS</b>	No
<b>LIFETIME L70/B50 AT 25°C</b>	400000
<b>LIFETIME L90/B10 AT 25°C</b>	100000
<b>LIGHT COLOUR ACCORDING TO EN 12464-1</b>	neutral white 3300 to 5300 K
<b>BEG FUNDING</b>	Only relevant in Germany
<b>LED OPERATING CURRENT IN MA</b>	266
<b>SHAPE</b>	Rectangular
<b>COLOUR</b>	White