


PRODUCT NO. 3487

**DOTLUX QUICK-FIXplus 16 4 W warm white 3000K LED interchangeable module (with 4 W emergency lighting module with separate connection)**



to the product page

- Universal MAGNET LED module with integrated driver for quick and easy replacement of light sources in existing ceiling and wall luminaires
- Extra high magnetic feet enable installation above the existing cabling
- Very high efficiency of up to 120lm/W thanks to low-current LEDs and therefore long service life
- Our QUICK-FIXplus luminaires comply with DIN EN60598-2-22:2014, a standard that confirms approval in the field of emergency lighting.
- Special lenses with 170° beam angle ensure absolutely shadow-free light distribution even in larger luminaires up to 400mm
- Integrated 4W emergency lighting module with separate power supply unit suitable for central battery

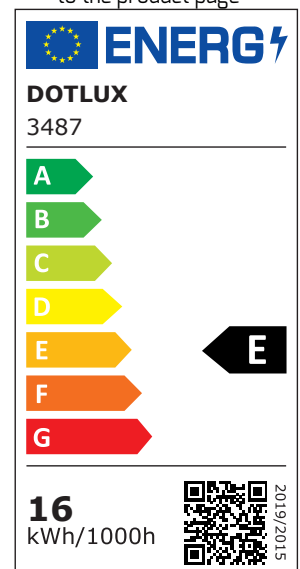

<b>WEIGHT IN KG</b>	0.2
<b>POWER CONSUMPTION IN WATTS</b>	16 + 4
<b>NET LUMINOUS FLUX IN LUMENS</b>	1900 / 450
<b>LUMEN PER WATT</b>	119

**Dimensions**

**height:** 68mm  
**diameter:** 180mm

<b>BEAM ANGLE</b>	170
<b>PROTECTION CLASS (IP)</b>	IP40
<b>TEMPERATURE RANGE</b>	-40°C to +50°C
<b>INPUT VOLTAGE</b>	186 - 240 AC/DC
<b>SERVICE LIFE</b>	approx. 40.000 h at 25°C
<b>COLOR TEMPERATURE IN KELVIN</b>	3000
<b>LUMEN PER WATT</b>	119
<b>PROTECTION CLASS</b>	II
<b>VOLTAGE TYPE</b>	AC/DC
<b>SWITCH CYCLES</b>	> 80.000
<b>INPUT VOLTAGE SPAN</b>	186-240 AC/DC
<b>WARRANTY IN YEARS</b>	3
<b>INPUT VOLTAGE RANGE LUMINAIRE</b>	186-240 AC/DC
<b>ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015</b>	E
<b>ETIM GROUP IDENTIFICATION NUMBER</b>	EC000996
<b>COLOUR CONSISTENCY (MCADAM ELLIPSE)</b>	SDCM4
<b>CONNECTION TYPE</b>	Cable
<b>PHOTOBIOLOGICAL SAFETY ACCORDING TO EN 62471</b>	RG1
<b>COMPATIBLE WITH APPLE HOMEKIT</b>	No
<b>COMPATIBLE WITH GOOGLE ASSISTANT</b>	No
<b>COMPATIBLE WITH AMAZON ALEXA</b>	No
<b>IFTTT SUPPORT AVAILABLE</b>	No

<b>FLEXIBLE</b>	Nein
<b>SUITABLE FOR TRAFFIC LIGHTS</b>	No
<b>EXTERNAL DRIVER REQUIRED</b>	No
<b>SUITABLE FOR CONSTANT VOLTAGE</b>	No
<b>SUITABLE FOR GENERAL LIGHTING</b>	Yes
<b>SUITABLE FOR CONSTANT CURRENT</b>	No
<b>SUITABLE FOR RAIL TRAFFIC</b>	No
<b>SUITABLE FOR MATRIX INFORMATION BOARDS</b>	No
<b>SUITABLE FOR VARIABLE ROAD SIGNS</b>	No
<b>LIGHT COLOUR ACCORDING TO EN 12464-1</b>	warm white <3300 K
<b>BEG FUNDING</b>	Only relevant in Germany
<b>LED OPERATING CURRENT IN MA</b>	110-40
<b>SHAPE</b>	Round
<b>COLOUR</b>	Yellow