


PRODUCT NO. 3942-040IP205M

**DOTLUX LED strip 48W 8mm 4000K IP20 5m roll incl. 50cm connection cable on both sides**



to the product page

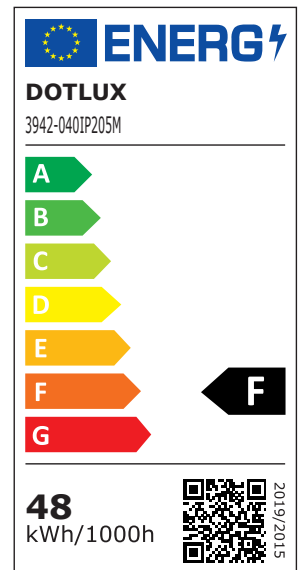

- Cozy and natural light due to extra high color rendering RA>92
- Consistent color temperature due to 3-step Mac Adam binning
- Very densely arranged LEDs enable homogeneous luminous surfaces at smallest distances
- Secure Solder Connect Technology prevents hairline cracks and cold solder joints
- Reinforced conductor tracks ensure uniform brightness
- Original 3M adhesive tape provides strong hold
- 50 cm connection cable pre-mounted on both sides

SUCCESSION ARTICLE	-
PREDECESSOR ARTICLE	1982-2
WEIGHT IN KG	0.12
POWER CONSUMPTION IN WATTS	48
NET LUMINOUS FLUX IN LUMENS	4200

**Dimensions**

**length:** 5000mm  
**width:** 8mm  
**height:** 1mm

BEAM ANGLE	120
PROTECTION CLASS (IP)	IP20
LIGHT COLOR	white
SERVICE LIFE	approx. 50.000 h at 25°C
COLOR TEMPERATURE IN KELVIN	4000
COLOR-RENDERING-INDEX	CRI > 92
AMOUNT OF LED/M	140
SEVERABLE BY MM	50
TC TEMPERATURE IN °C	67
OUTPUT W/M	9,6
LIGHT FLUX LM/M	840
SMALLEST BEND RADIUS IN MM	25
INPUT VOLTAGE SPAN	24 V DC
WARRANTY IN YEARS	7
INPUT VOLTAGE RANGE LUMINAIRE	24 V DC
ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	F
ETIM GROUP IDENTIFICATION NUMBER	ECC002706
COMPATIBLE WITH APPLE HOMEKIT	No
COMPATIBLE WITH GOOGLE ASSISTANT	No
COMPATIBLE WITH AMAZON ALEXA	No
BEG FUNDING	Only relevant in Germany
ENERGY EFFICIENCY CLASS OF THE LIGHT SOURCE OF A LUMINAIRE	-
COLOUR OF LIGHT ADJUSTABLE	No