


PRODUCT NO. 3943-040IP665M

DOTLUX LED strip 48W 10mm 4000K IP66 5m roll incl. 50cm connection cable on both sides



to the product page

- Cozy and natural light due to extra high color rendering RA>92
- Consistent color temperature due to 3-Step Mac Adam binning and specially extruded IP66 protective cover
- Very densely arranged LEDs allow homogeneous illuminated areas at smallest distances
- Secure Solder Connect Technology prevents hairline cracks and cold solder joints
- Reinforced conductive traces ensure uniform brightness
- Original 3M adhesive tape provides strong hold
- 15 cm connection cable pre-mounted on one side

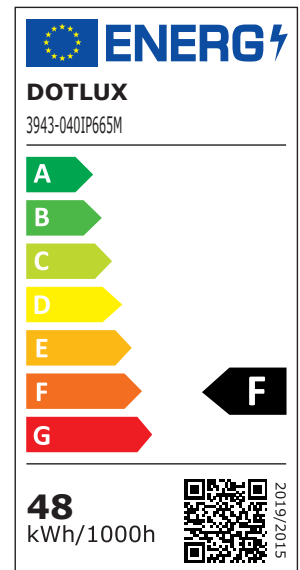

SUCCESSION ARTICLE	-
PREDECESSOR ARTICLE	1982-2
WEIGHT IN KG	0.25
POWER CONSUMPTION IN WATTS	48
NET LUMINOUS FLUX IN LUMENS	4150

Dimensions

length: 5000mm
width: 10mm
height: 5mm

BEAM ANGLE	120
PROTECTION CLASS (IP)	IP66
LIGHT COLOR	white
SERVICE LIFE	approx. 50.000 h at 25°C
COLOR TEMPERATURE IN KELVIN	4000
COLOR-RENDERING-INDEX	CRI > 92
AMOUNT OF LED/M	140
SEVERABLE BY MM	50
TC TEMPERATURE IN °C	67
OUTPUT W/M	9,6
LIGHT FLUX LM/M	800
SMALLEST BEND RADIUS IN MM	25
INPUT VOLTAGE SPAN	24 V DC
WARRANTY IN YEARS	7
INPUT VOLTAGE RANGE LUMINAIRE	24 V DC
ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	F
ETIM GROUP IDENTIFICATION NUMBER	EC002706
COMPATIBLE WITH APPLE HOMEKIT	No
COMPATIBLE WITH GOOGLE ASSISTANT	No
COMPATIBLE WITH AMAZON ALEXA	No
BEG FUNDING	Only relevant in Germany
ENERGY EFFICIENCY CLASS OF THE LIGHT SOURCE OF A LUMINAIRE	-
COLOUR OF LIGHT ADJUSTABLE	No