


PRODUCT NO. 3945-02765IP205M

DOTLUX LED strip 96W 10 mm COLORselect 2700-6500K IP20 5m roll incl. 50cm connection cable both sides



to the product page

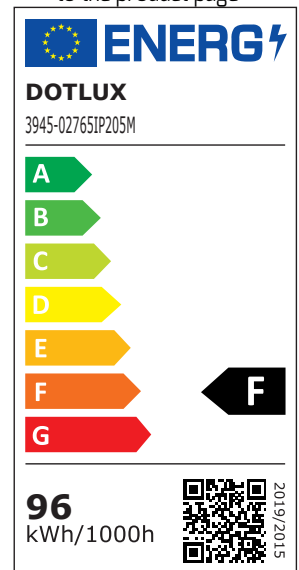

- Cozy and natural light due to extra high color rendering RA>92
- Consistent color temperature due to 3-Step Mac Adam binning and specially extruded IP66 protective cover
- Very densely arranged LEDs allow homogeneous illuminated areas at smallest distances
- Secure Solder Connect Technology prevents hairline cracks and cold solder joints
- Reinforced conductor paths ensure uniform brightness
- Original 3M adhesive tape provides strong hold
- 15 cm connection cable pre-mounted on one side

SUCCESSION ARTICLE	-	BEAM ANGLE	120
WEIGHT IN KG	0.14	PROTECTION CLASS (IP)	IP20
POWER CONSUMPTION IN WATTS	96	LIGHT COLOR	multicoloured
NET LUMINOUS FLUX IN LUMENS	max. 9250	SERVICE LIFE	approx. 50.000 h at 25°C
		COLOR TEMPERATURE IN KELVIN	2700-6500
		COLOR-RENDERING-INDEX	CRI > 92
		AMOUNT OF LED/M	240
		SEVERABLE BY MM	30
		TC TEMPERATURE IN °C	67
		OUTPUT W/M	19,2
		LIGHT FLUX LM/M	1850
		SMALLEST BEND RADIUS IN MM	25
		INPUT VOLTAGE SPAN	24 V DC
		WARRANTY IN YEARS	7
		INPUT VOLTAGE RANGE LUMINAIRE	24 V DC
		ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	F
		ETIM GROUP IDENTIFICATION NUMBER	EC002706
		COLOUR OF LIGHT ADJUSTABLE	Positions
		COMPATIBLE WITH APPLE HOMEKIT	No
		COMPATIBLE WITH GOOGLE ASSISTANT	No
		COMPATIBLE WITH AMAZON ALEXA	No
		BEG FUNDING	Only relevant in Germany
		ENERGY EFFICIENCY CLASS OF THE LIGHT SOURCE OF A LUMINAIRE	-

Dimensions

length: 5000mm
width: 10mm
height: 1mm